



Chennai Paints – Superprime Wall Primer for Exterior

It is a under coat wall primer-water thin able and is a water Suitable for application on exteriors as an undercoat to Surfaces+ emulsions paint. it is a high quality primer for External plaster surface to improve adhesion between the wall and topcoat material. Suitable for painting on plastered wall, asbestors, cement rendering, brick work, lime plaster, concrete etc.

Advantages

- Enhances paint life with good sealing properties.
- Smoother Finish Excellent opacity and whiteness.

- No Curing and No chalking.
- Extra Topcoat Coverage and Stronger Adhesion.

- No added lead, Mercury or Chromium compounds hence it is environmentally safe; being a water base product, is both hygienic and Non-flammable.



Pack Size 50, 20, 10, 4 & 1 Liter

 Water Base



Application

- New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.
- It is recommended to apply 1 coat of Chennai paints Exterior wall primer and allow it to dry 6-8 hrs before applying top coat.
- It is not advisable to add more than 1 liter of water in 1 liter of this product, depending on absorption property of the surface.
- Ensure that surface is completely free from all dirt, loosely held plaster, powdery residue, oil, grease or any other contamination.
- Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.
- One coat of Chennai Paints –Bio wash is recommended to prevent further growth of algae, fungus or moss.



Direction for Use

Apply through Brush/ Spray/ Roller.

New masonry surfaces must be allowed to cure completely.

STEP 1

Apply One coat of Chennai Paints Bio wash



STEP 2

Apply 1 coat of Chennai paints Exterior wall primer.



STEP 3

Allow it to dry for 6-8 hrs



Ensure that surface is completely free from all unwanted things


STEP 4

Apply the finishing coat of Surfaces + Emulsion Paint



Coverage

Approximately 75-90 sq.ft per Lt When diluted with 1 lit water depending upon the grading / porosity of the sand (texture of surface) and the condition and type of the surface to be treated.

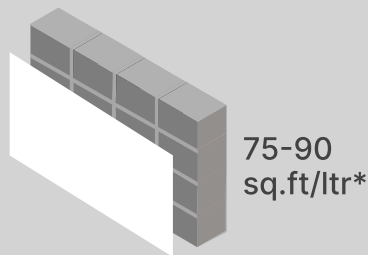

*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity

Technical Details

• TECHNICAL DETAILS

- **Nature** - Free Flowing Liquid
- **Colour** - Milky white
- **Dilution Ratio** - 1; 1 primer: clean water
- **Drying Time** - 3-4 hrs hard dry / 10-15 minutes surface dry, depending on climatic condition.
- **Shelf Life** - 16-18 Months from the date of manufacture in original company's tightly Sealed packing away from direct sunlight and excessive heat.
- **Curing** - Does not require curing with water
- **Sheen Level** - Smooth & Matt



Information on Health & Safety

- All Chennai Paints products contain no added Lead, Mercury, Arsenic or Chromium
- Store the container with the lid tightly closed in an upright position, in a cool, dry and well ventilated location away from source of ignition and fire.
- Keep out of reach of children and away from food, drink May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Avoid contact with skin for prolonged period. In case of any contact with eyes, wash immediately with plenty of water and seek medical attention.
- Use protective equipments like rubber or polythene gloves, safety goggles or glasses, face mask while handling the paint.
- Do not pour leftover paint down the drain or in water courses. In the event of spills, contain spillage using sand

Note- Specifications subject to change without notification. The technical data provided is as per our internal lab testing and may vary as per the actual installation method of application done at site

Disclaimer – Information provided on this data sheet is only a guideline for usage. It is advised to undertake a trial of the product before full scale usage. Any information and / or specification contained / shared herein is to the best of our knowledge true and accurate, no guaranty / warranty is given or implied in connection with any recommendation or suggestions made by us the company (Chennai Paints), our Representatives, Agents or Distributors, as the conditions of use of any labour involved, site conditions are beyond our control.